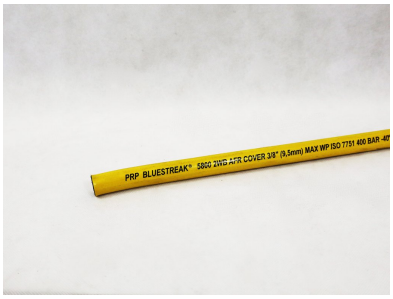

Bluestreak® 5800

Hogedruk reinigingsslang met staalinlagen

Geschikt voor hogedruk reiniging tot 400 bar in de voedselverwerkende industrie

- Gladde AFR® (Animal Fat Resistant) buitenwand
- Geschikt voor heet water tot 70°C met werkdruk tot 400 bar
- Zeer slijtvast en uitstekende flexibiliteit
- Buitenwand geeft geen kleur af

Hochdruck Reinigerschlauch mit Stahleinlagen

Geeignet für Hochdruckreinigung bis 400 bar in der lebensmittelverarbeitende Industrie

- Glatte AFR® (Animal Fat Resistant) Decke
- Geeignet für Heißwasser bis zu 70°C bei 400 Bar Betriebsdruck
- Hoch flexibel und abriebfest
- Außendecke absolut farbecht

High pressure cleaning hose with steel wire braids

Suitable for high pressure cleaning up to 400 bar in the food processing industry

- Smooth AFR® (Animal Fat Resistant) cover
- Suitable for hot water up to 70°C at 400 bar working pressure
- Excellent abrasion resistance and flexibility
- Cover will not smudge or mark surfaces

Materiaal binnen:	NBR
Kleur inwendig:	Zwart
Materiaal buiten:	AFR Compound
Kleur uitwendig:	Blauw / Geel
Inlagen:	Gevlochten staal inlagen

Material Seele:	NBR
Farbe Seele:	Schwarz
Material Decke:	AFR Compound
Farbe Decke:	Blau / Gelb
Einlagen:	Geflochtene Stahleinlagen

Material tube:	NBR
Colour tube:	Black
Material cover:	AFR Compound
Colour cover:	Blue / Yellow
Reinforcements:	Braided steel reinforcements

- Goede bestendigheid tegen dierlijke en plantaardige oliën en vetten
- Niet geschikt voor contact met, of doorvoer van, levensmiddelen

- Gute Beständigkeit gegen tierische und planzliche Öle und Fette
- Nicht geeignet für den Kontakt mit, oder Durchfuhr von, Lebensmitteln

- Excellent resistance to animal and vegetable oils and fats
- Not suitable for contact with, or transport of, foodstuff

Binnen Innen Inside ø mm	Buiten Aussen Outside ø mm	Buigstr. Biegerad. Bendrad. mm	Vacuüm Vakuum Vacuum Bar	Gewicht Gewicht Weight gr/m	Werkdruk Betriebsdruck Work. press. Bar
7.9	15	85	0	335	400
9.5	17.1	90	0	420	400

Normeringen | Normen | Standards
ISO 7751

Temperatuur | Temperatur | Temperature
Min. -40 °C | Max. 100 °C

Werkdruk | Betriebsdruck | Working pressure
Min. 400 bar | Max. 400 bar

Barstdruk | Platzdruck | Burst pressure
Min. 1600 bar | Max. 1600 bar

Technische wijzigingen voorbehouden, Techn. Änderungen möglich ohne vorige Ankündigung, Tech.data subject to change without prior notice